

BOUTET


Poignée DB avec tube en aluminium \varnothing 20 mm

Poignée universelle. La traverse et les montants sont ajustés et livrés assemblés. Montants en polyamide renforcé de billes de verre, noir mat. Tube en aluminium anodisé. La poignée existe en 2 versions, avec ou sans gaine plastique tubulaire striée. La poignée comprend deux vis cylindriques avec six pans creux, écrous et rondelles. Traction maximale supérieure à 1000 N.



Handle DB with aluminium tube \varnothing 20 mm

Handle shanks and caps made of high duty polyamide, glass bead reinforced, black, half-matt. Connecting tube made of aluminium AlMgSi 0.5, ground and anodized. The handle shanks are designed with 4 clamping bars ; when the tube is inserted, they will peel off and provide firm fitting. Handle supplied with galvanized fastening material. Handle is supplied assembled. Stress resistance min. 1000 N.

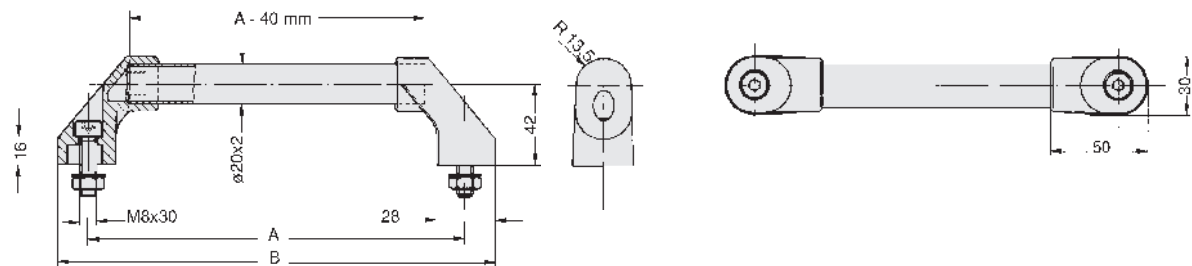

A	B	REFERENCE sans gaine without plastic cover	REFERENCE avec gaine with plastic cover
180	210	10530	10540
200	230	10531	10541
250	280	10532	10542
300	330	10533	10543
350	380	10534	10544
400	430	10535	10545
500	530	10536	10546
600	630	10537	10547